


modern recessed luminaire for modular suspended ceilings for LED light sources

<b>TECHNICAL DATA</b>	<b>Mounting:</b> directly in the ceiling construction <b>Body:</b> powder-painted steel sheet <b>Luminaire colour:</b> white
<b>ELECTRICAL DATA</b>	<b>Power supply efficiency:</b> >90% <b>Electrical connection:</b> 3x2,5 mm <sup>2</sup> wire <b>Power:</b> 220-240V 50/60Hz <b>Includes light source:</b> yes
<b>OPTICAL DATA</b>	<b>Light distribution:</b> symmetric <b>Way of lighting:</b> direct
<b>ADDITIONAL INFO</b>	<b>Louver:</b> mat aluminum, matt white aluminum, polished aluminum <b>Available on request:</b> DALI <b>Operating temperature range:</b> 0°C - 35°C <b>Lifetime (L70B50):</b> 50 000 h
<b>GENERAL DATA</b>	<b>Warranty:</b> 3 years <b>Application:</b> offices, hospitals, laboratories, supermarkets, classrooms, auditorium



Code	Replacement of conventional technology	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	UGR
<b>Louver: mat aluminum</b>									
300061.00145	2x28W	35	39	4700	3700	95	3000	80	<17
300061.00146	2x28W	35	39	4850	3850	99	4000	80	<17
<b>Louver: matt white aluminum</b>									
300061.00147	2x28W	35	39	4700	3900	100	3000	80	<17
300061.00148	2x28W	35	39	4850	4050	104	4000	80	<17
<b>Louver: polished aluminum</b>									
300061.00143	2x28W	35	39	4700	4000	103	3000	80	<17
300061.00144	2x28W	35	39	4850	4100	105	4000	80	<17

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package
<b>Louver: mat aluminum</b>				
300061.00145	1195 295 65	1200 300	44	1
300061.00146	1195 295 65	1200 300	44	1
<b>Louver: matt white aluminum</b>				
300061.00147	1195 295 65	1200 300	44	1
300061.00148	1195 295 65	1200 300	44	1
<b>Louver: polished aluminum</b>				
300061.00143	1195 295 65	1200 300	44	1
300061.00144	1195 295 65	1200 300	44	1

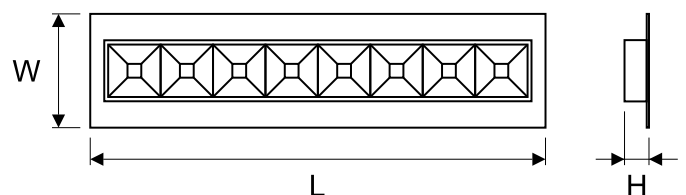

Luminous flux tolerance +/- 10%

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm

Up-to-date product info available on our website